

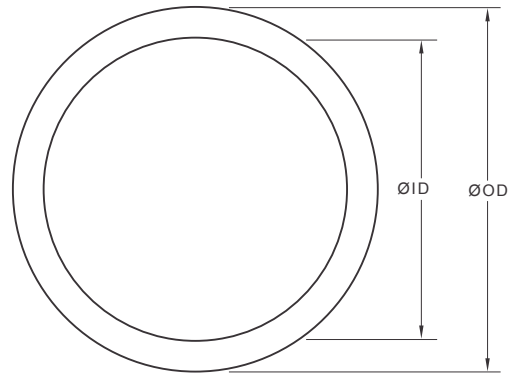


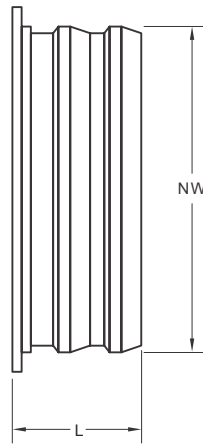

- To be used with LHR coarse profile type of conduit
- High-grade formulated Nylon 6.6
- Self-extinguishing, free from halogens and cadmium
- Excellent impact strength
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)



Specifications are subject to change without notice

Order No.	Fits to	ØID		ØOD		L	
	NW	mm	in	mm	in	mm	in
KR-IS-48	48	44.0	1.73	51.0	2.01	18.0	0.71
KR-IS-56	56	53.0	2.09	67.0	2.64	21.0	0.83
KR-IS-70	70	63.0	2.48	80.0	3.15	23.0	0.91