

2:1 Shield heatshrink tubing is a unique combination of Polyolefin and conductive cloth, with a high frequency EMI shielding properties. This product, a flame retardant and fluid resistant tubing, is a perfect solution for protecting your wire & cable bundles.




- Mil-I-DTL-23053/5
- Flame Retardant
- Excellent High Frequency EMI Shielding
- Flame Retardant UL224
- Easily Installs Over Connectors & Splices



TYPE	COLOUR
M2C	0.50 BK
NW	



Maximum Continuous
Mil-I-23053
275°F (135°C)
Minimum Continuous
-67°F (-55°C)

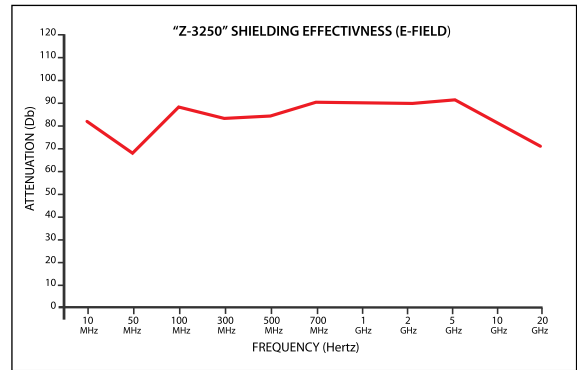

Specifications are subject to change without notice

Order Number	Nominal Width	Unshrunk Diameter		Shrunk Diameter		Weight		Shop Box Put Up/12m Pcs.
	(NW)	(mm)	(in)	(mm)	(in)	Kg/10 Pcs.	Lbs/10 Pcs.	
M2C0.19BK	3/16"	4.80	0.19	2.40	0.09	0.14	0.31	2
M2C0.25BK	1/4"	6.40	0.25	3.20	0.13	0.23	0.50	2
M2C0.38BK	3/8"	9.50	0.37	4.80	0.19	0.29	0.63	2
M2C0.50BK	1/2"	12.70	0.50	6.40	0.25	0.34	0.75	2
M2C0.75BK	3/4"	19.10	0.75	9.50	0.37	0.45	1.00	2
M2C1.00BK	1"	25.40	1.00	12.70	0.50	0.68	1.50	2
M2C1.50BK	1 1/2"	38.10	1.50	19.10	0.75	1.02	2.25	2