


MAG sleeving is a heat-treated, tightly braided fiberglass sleeving coated with a dielectric acrylic resin. This durable sleeving will withstand mechanical stress and holds its dielectric strength on all bends. This sleeve is used in applications such as relays, radio circuits, transformers, and lead/crossover protection on motors. Highly resistant to acids and solvents, and will withstand tough assembly handling. Sleeving is recommended for thermal requirements from 105°C (221°F) to 155°C (311°F) ranges.



- Rated to 155°C (311°F) Class F
- UL Recognized File # E329693
- Grade A (7,000 V)
- Cut and abrasion resistant
- Excellent low temp. Flexibility -25°C (-13°F)
- Resists acids and most organic solvents

TYPE	COLOUR
<b>MAG 1.00 NT</b>	
NW	

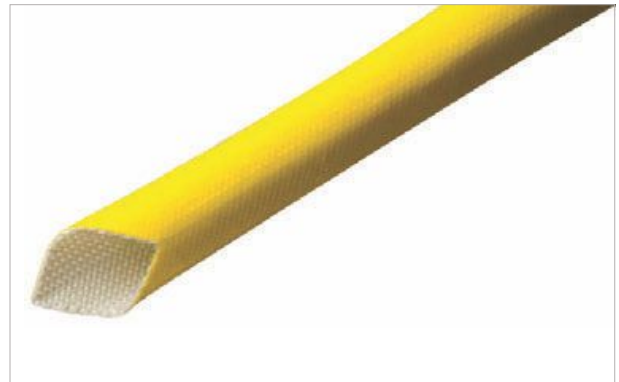

Specifications are subject to change without notice

Order Number	Nominal width	Diameter		Wall Thickness		Standard Spool Put-Ups		Available Colours
	(NW)	(mm)	(in)	(mm)	(in)	(M)	(F)	
MAGG.24	24	0.6	0.022	0.5	0.018	305	1000	NT, BK, YL, RD
MAGG.22	22	0.7	0.027	0.5	0.018	305	1000	NT, BK, YL, RD
MAGG.20	20	0.9	0.034	0.5	0.018	305	1000	NT, BK, YL, RD
MAGG.18	18	1.1	0.042	0.5	0.018	305	1000	NT, BK, YL, RD
MAGG.16	16	1.3	0.053	0.5	0.020	152	500	NT, BK, YL, RD
MAGG.14	14	1.7	0.066	0.5	0.020	152	500	NT, BK, YL, RD
MAGG.12	12	2.2	0.085	0.6	0.022	152	500	NT, BK, YL, RD
MAGG.11	11	2.4	0.095	0.6	0.022	152	500	NT, BK, YL, RD
MAGG.10	10	2.7	0.106	0.6	0.022	152	500	NT, BK, YL, RD
MAGG.09	9	3.0	0.118	0.6	0.024	76	250	NT, BK, YL, RD
MAGG.08	8	3.4	0.133	0.6	0.024	76	250	NT, BK, YL, RD
MAGG.07	7	3.8	0.148	0.6	0.024	76	250	NT, BK, YL, RD
MAGG.06	6	4.2	0.166	0.6	0.024	76	250	NT, BK, YL, RD
MAGG.05	5	4.7	0.186	0.7	0.028	61	200	NT, BK, YL, RD
MAGG.04	4	5.3	0.208	0.7	0.028	61	200	NT, BK, YL, RD
MAGG.03	3	5.9	0.234	0.7	0.028	61	200	NT, BK, YL, RD
MAGG.02	2	6.7	0.263	0.7	0.028	61	200	NT, BK, YL, RD
MAGG.01	1	7.5	0.294	0.7	0.028	38	125	NT, BK, YL, RD
MAGG.00	0	8.4	0.330	0.7	0.028	38	125	NT, BK, YL, RD
MAG0.38	3/8"	9.5	0.375	0.9	0.034	38	125	NT, BK, YL, RD
MAG0.44	7/16"	11.1	0.438	0.9	0.034	15	50	NT, BK, YL, RD
MAG0.50	1/2"	12.7	0.500	0.9	0.034	15	50	NT, BK, YL, RD
MAG0.63	5/8"	15.9	0.625	0.9	0.034	15	50	NT
MAG0.75	3/4"	19.1	0.750	1.0	0.040	15	50	NT
MAG0.88	7/8"	22.2	0.875	1.0	0.040	15	50	NT
MAG1.00	1"	25.4	1.000	1.0	0.040	15	50	NT
MAG1.13	1 1/8"	28.6	1.125	N/A	N/A	N/A	N/A	NT
MAG1.25	1 1/4"	31.8	1.250	N/A	N/A	N/A	N/A	NT
MAG1.38	1 3/8"	34.9	1.375	N/A	N/A	N/A	N/A	NT
MAG1.50	1 1/2"	38.1	1.500	N/A	N/A	N/A	N/A	NT
MAG1.63	1 5/8"	41.3	1.625	N/A	N/A	N/A	N/A	NT
MAG1.75	1 3/4"	44.5	1.750	N/A	N/A	N/A	N/A	NT
MAG2.00	2"	50.8	2.000	N/A	N/A	N/A	N/A	NT

\*For the large fractional sizes, currently they only come in 36" stick lengths. 15 sticks, 3 foot long, for a total of 45 foot bundle. Non continuous length.