

MFA/MSF sleeving is an extremely flexible braided fiberglass sleeve coated with a flame retardant elastomeric silicone rubber sheath. The unique self-fitting construction allows the sleeving to expand slightly for easy installation, and provides a snug fit for minimum movement and reduced internal abrasion.

Silicone sleeving is rated to 200°C [392°F]. (Class H), is abrasion resistant, and maintains its flexibility in low temperature environments. It is available in a very wide range of sizes, and is ideal for use in appliance assemblies, wire harnesses, transformer leads, power supplies, motor coil and heater leads.




- Rated to 392°F Class H (200°C)
- Flame Retardant
- Grade A (7,000 V) Mil-I-3190/6
- Grade C (2,500 V)
- Cut and Abrasion Resistant
- Excellent Low Temp Flexibility
- Resists Acids, Alkalis, Organic Solvents, & Aliphatic Hydrocarbons



TYPE	COLOUR
MFA0.38BK	
GRADE	NW

- BK - BLACK
- WH - WHITE
- RD - RED

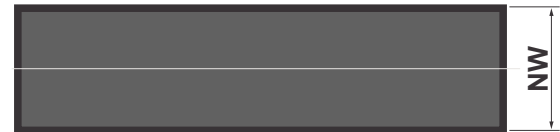

Nominal Size	Diameter		Order Number	Grade	Order Number	Grade	Standard Spool Put-Ups	
	mm	in					M	ft.
24	0.56	0.022	MFA G.24	A	MSFG.24	C	75	250
22	0.69	0.027	MFA G.22	A	MSFG.22	C	75	250
20	0.86	0.034	MFA G.20	A	MSFG.20	C	75	250
18	1.07	0.042	MFA G.18	A	MSFG.18	C	75	250
16	1.35	0.053	MFA G.16	A	MSFG.16	C	75	250
14	1.68	0.066	MFA G.14	A	MSFG.14	C	75	250
12	2.16	0.085	MFA G.12	A	MSFG.12	C	75	100
10	2.69	0.106	MFA G.10	A	MSFG.10	C	75	100
9	3.00	0.118	MFA G.09	A	MSFG.09	C	75	100
8	3.38	0.133	MFA G.08	A	MSFG.08	C	75	100
7	3.76	0.148	MFA G.07	A	MSFG.07	C	75	100
6	4.22	0.166	MFA G.06	A	MSFG.06	C	75	100
5	4.72	0.186	MFA G.05	A	MSFG.05	C	75	100
4	5.28	0.208	MFA G.04	A	MSFG.04	C	75	100
3	5.94	0.234	MFA G.03	A	MSFG.03	C	75	100
2	6.68	0.263	MFA G.02	A	MSFG.02	C	75	100
1	7.47	0.294	MFA G.01	A	MSFG.01	C	15	50
0	8.38	0.330	MFA G.00	A	MSFG.00	C	15	50
3/8"	9.53	0.375	MFA0.38	A	MSF0.38	C	15	50
7/16"	11.13	0.438	MFA0.44	A	MSF0.44	C	15	50
1/2"	12.70	0.500	MFA0.50	A	MSF0.50	C	15	50
5/8"	15.88	0.625	MFA0.63	A	MSF0.63	C	15	50
3/4"	19.05	0.750	MFA0.75	A	MSF0.75	C	15	50
7/8"	22.23	0.875	MFA0.88	A	MSF0.88	C	15	50
1"	25.40	1.000	MFA1.00	A	MSF1.00	C	15	50
1 1/4"	31.75	1.250	MFA1.25	A	N/A	N/A	15	50
1 1/2"	38.10	1.500	MFA1.50	A	N/A	N/A	15	50