


MIW protects and shields important hoses and cables from extreme heat and catastrophic flame outbreaks. It protects continuously to 260°C (500°F) and will withstand a molten splash at 1200°C (2200°F). Its unique hook and loop closure system allows for installation without the need to remove and reconnect fittings and terminations. The reusable closure additionally allows for easy repair, minimizing labour and costly downtime.

- Resists Molten Splash up to 1200°C (2200°F)
- Strong Hook and Loop Closure
- Wrap Around Fire Protection

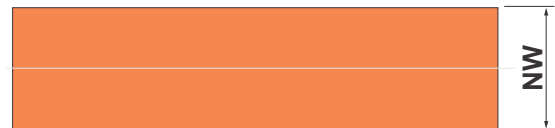

Specifications are subject to change without notice

Order Number	Nominal Width	Wall Thickness		Velcro Width		Weight <i>Lbs/100'</i>	Standard Spool Put-Ups	
	(NW)	(mm)	(in)	(mm)	(in)		(M)	(F)
MIW1.00RD	1"	11.45	0.450	15.87	5/8"	9.16	7.65	25
MIW1.50RD	1 1/2"	11.45	0.450	15.87	5/8"	12.98	7.65	25
MIW2.00RD	2"	11.45	0.450	15.87	5/8"	16.80	7.65	25
MIW2.50RD	1 1/2"	11.45	0.450	15.87	5/8"	20.61	7.65	25
MIW3.00RD	3"	11.45	0.450	15.87	5/8"	24.43	7.65	25
MIW3.50RD	3 1/2"	11.45	0.450	15.87	5/8"	28.25	7.65	25
MIW4.00RD	4"	11.45	0.450	15.87	5/8"	32.07	7.65	25