







**INSERTION TOOL WITH HOLE**



- Specially modified Polyamide
- Self-extinguishing, free from halogens and cadmium
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)



**INSERTION TOOL WITH HANDLE**

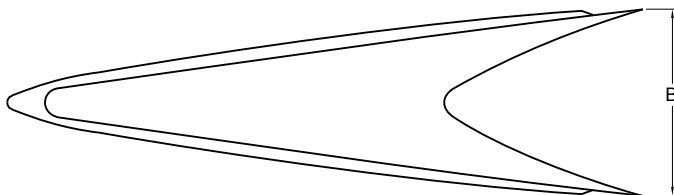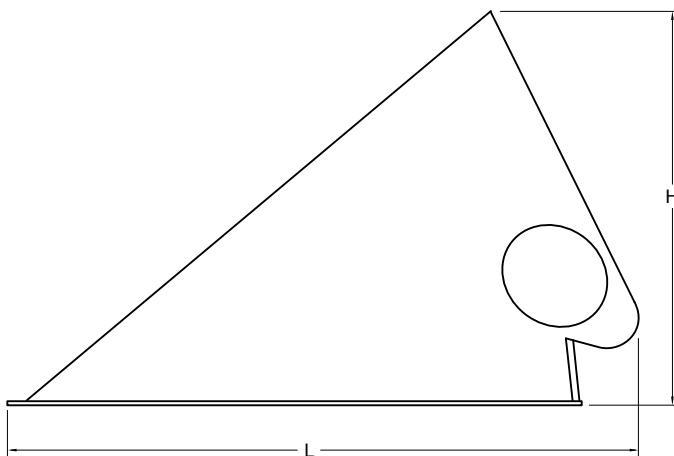

Specifications are subject to change without notice

Order No.	Fits From-To	L		B		H	
	NW	mm	in	mm	in	mm	in
STH-0734	07 - 34	118.0	4.65	40.0	1.57	75.0	2.95
STD-0734	07 - 34	118.0	4.65	40.0	1.57	75.0	2.95