
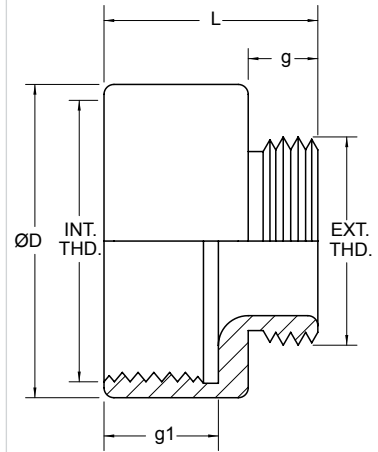


These fittings are used in the adaptation of parts to an application in order to work together as a unit. They are commonly made by using a female (inner) to a male (outer) thread combination on each part.

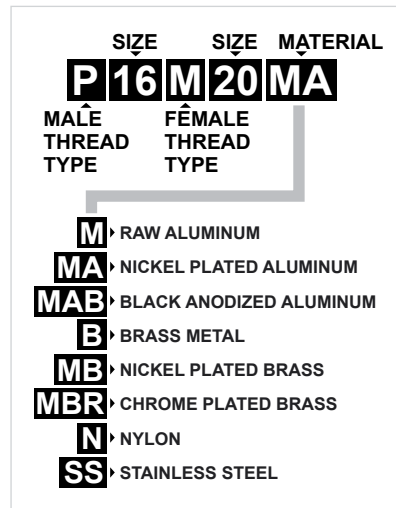

Specifications are subject to change without notice

FROM PG TO METRIC THREAD

Order Number	EXT. THD.	INT. THD.	Ø D		L		g		g1	
			mm	in	mm	in	mm	in	mm	in
P07M16MA	PG 7	M16x1.5	18.0	0.71	16.0	0.63	6.0	0.24	8.5	0.33
P09M16MA	PG 9	M16x1.5	18.0	0.71	16.0	0.63	6.0	0.24	8.5	0.33
P11M16MA	PG 11	M16x1.5	20.0	0.79	16.0	0.63	6.0	0.24	7.0	0.28
P07M20MA	PG 7	M20x1.5	22.0	0.87	16.0	0.63	6.0	0.24	8.5	0.33
P09M20MA	PG 9	M20x1.5	22.0	0.87	16.0	0.63	6.0	0.24	8.5	0.33
P11M20MA	PG 11	M20x1.5	24.0	0.94	16.0	0.63	6.0	0.24	8.5	0.33
P13M20MA	PG 13	M20x1.5	24.0	0.94	20.0	0.79	5.0	0.20	12.0	0.47
P07M22MA	PG 7	M22x1.5	24.0	0.94	16.0	0.63	6.0	0.24	8.5	0.33
P09M22MA	PG 9	M22x1.5	24.0	0.94	16.0	0.63	6.0	0.24	8.5	0.33
P11M22MA	PG 11	M22x1.5	24.0	0.94	16.0	0.63	6.0	0.24	8.5	0.33
P13M22MA	PG 13	M22x1.5	24.0	0.94	16.0	0.63	6.0	0.24	8.5	0.33
P16M20MA	PG 16	M20x1.5	26.0	1.02	16.0	0.63	6.0	0.24	7.0	0.28
P07M25MA	PG 7	M25x1.5	27.0	1.06	18.0	0.71	6.0	0.24	10.5	0.41
P09M25MA	PG 9	M25x1.5	27.0	1.06	18.0	0.71	6.0	0.24	10.5	0.41
P11M25MA	PG 11	M25x1.5	27.0	1.06	18.0	0.71	6.0	0.24	10.5	0.41
P13M25MA	PG 13	M25x1.5	27.0	1.06	18.0	0.71	6.0	0.24	10.5	0.41
P16M22MA	PG 16	M22x1.5	27.0	1.06	16.0	0.63	6.0	0.24	8.5	0.33
P16M25MA	PG 16	M25x1.5	27.0	1.06	18.0	0.71	6.0	0.24	10.5	0.41
P21M25MA	PG 21	M25x1.5	30.0	1.18	19.0	0.75	7.0	0.28	10.5	0.41
P07M32MA	PG 7	M32x1.5	34.0	1.34	20.5	0.81	6.0	0.24	12.0	0.47
P09M32MA	PG 9	M32x1.5	34.0	1.34	20.5	0.81	6.0	0.24	12.0	0.47
P11M32MA	PG 11	M32x1.5	34.0	1.34	20.5	0.81	6.0	0.24	12.0	0.47
P13M32MA	PG 13	M32x1.5	34.0	1.34	20.5	0.81	6.0	0.24	12.0	0.47
P16M32MA	PG 16	M32x1.5	34.0	1.34	20.5	0.81	6.0	0.24	12.0	0.47
P21M32MA	PG 21	M32x1.5	34.0	1.34	21.5	0.85	7.0	0.28	12.0	0.47
P13M40MA	PG 13	M40x1.5	44.0	1.73	22.0	0.87	6.0	0.24	13.5	0.53
P07M40MA	PG 7	M40x1.5	44.0	1.73	22.0	0.87	6.0	0.24	13.5	0.53
P09M40MA	PG 9	M40x1.5	44.0	1.73	22.0	0.87	6.0	0.24	13.5	0.53

Order Number	EXT. THD.	INT. THD.	Ø D		L		g		g1	
			mm	in	mm	in	mm	in	mm	in
P11M40MA	PG 11	M40x1.5	44.0	1.73	22.0	0.87	6.0	0.24	13.5	0.53
P16M40MA	PG 16	M40x1.5	44.0	1.73	22.0	0.87	6.0	0.24	13.5	0.53
P07M16MA	PG 21	M 40x1.5	44.0	1.73	23.0	0.91	7.0	0.28	13.5	0.53
P09M16MA	PG 29	M 40x1.5	44.0	1.73	24.0	0.94	8.0	0.31	13.5	0.53
P11M50MA	PG 13	M 50x1.5	54.0	2.13	25.0	0.98	6.0	0.24	16.5	0.65
P07M50MA	PG 7	M 50x1.5	54.0	2.13	25.0	0.98	6.0	0.24	16.5	0.65
P09M50MA	PG 9	M 50x1.5	54.0	2.13	25.0	0.98	6.0	0.24	16.5	0.65
P11M50MA	PG 11	M 50x1.5	54.0	2.13	25.0	0.98	6.0	0.24	16.5	0.65
P16M50MA	PG 16	M 50x1.5	54.0	2.13	25.0	0.98	6.0	0.24	16.5	0.65
P21M50MA	PG 21	M 50x1.5	54.0	2.13	26.0	1.02	7.0	0.28	16.5	0.65
P29M50MA	PG 29	M 50x1.5	54.0	2.13	27.0	1.06	8.0	0.31	16.5	0.65
P36M50MA	PG 36	M 50x1.5	54.0	2.13	28.0	1.10	9.0	0.35	16.5	0.65
P13M52MA	PG 13	M 52x1.5	56.0	2.20	25.0	0.98	6.0	0.24	16.5	0.65
P07M52MA	PG 7	M 52X1.5	56.0	2.20	25.0	0.98	6.0	0.24	16.5	0.65
P09M52MA	PG 9	M 52X1.5	56.0	2.20	25.0	0.98	6.0	0.24	16.5	0.65
P11M52MA	PG 11	M 52X1.5	56.0	2.20	25.0	0.98	6.0	0.24	16.5	0.65
P16M52MA	PG 16	M 52x1.5	56.0	2.20	25.0	0.98	6.0	0.24	16.5	0.65
P21M52MA	PG 21	M 52x1.5	56.0	2.20	26.0	1.02	7.0	0.28	16.5	0.65
P29M52MA	PG 29	M 52x1.5	56.0	2.20	27.0	1.06	8.0	0.31	16.5	0.65
P36M52MA	PG 36	M 52x1.5	56.0	2.20	28.0	1.10	9.0	0.35	16.5	0.65
P42M52MA	PG 42	M 52x1.5	56.0	2.20	29.0	1.14	10.0	0.39	16.5	0.65
P07M63MA	PG 7	M 63x1.5	67.0	2.64	28.0	1.10	6.0	0.24	19.5	0.77
P09M63MA	PG 9	M 63x1.5	67.0	2.64	28.0	1.10	6.0	0.24	19.5	0.77
P11M63MA	PG 11	M 63x1.5	67.0	2.64	28.0	1.10	6.0	0.24	19.5	0.77
P13M63MA	PG 13	M 63x1.5	67.0	2.64	28.0	1.10	6.0	0.24	19.5	0.77
P16M63MA	PG 16	M 63x1.5	67.0	2.64	28.0	1.10	6.0	0.24	19.5	0.77
P21M63MA	PG 21	M 63x1.5	67.0	2.64	29.0	1.14	7.0	0.28	19.5	0.77
P29M63MA	PG 29	M 63x1.5	67.0	2.64	30.0	1.18	8.0	0.31	19.5	0.77
P36M63MA	PG 36	M 63x1.5	67.0	2.64	31.0	1.22	9.0	0.35	19.5	0.77
P42M63MA	PG 42	M 63x1.5	67.0	2.64	32.0	1.26	10.0	0.39	19.5	0.77
P48M63MA	PG 48	M 63x1.5	67.0	2.64	32.0	1.26	10.0	0.39	19.5	0.77