



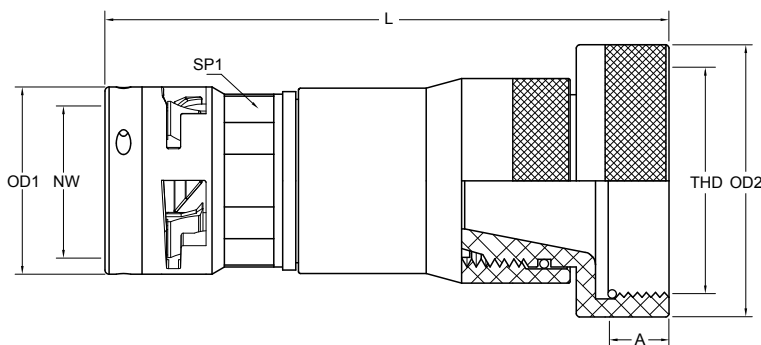

- Locking device system provides a quick and secure push-in connection of corrugated conduits
- High-grade formulated polyamide
- EMI/EMC end made of nickel-plated aluminum
- Low transfer impedances
- 360° clamping effect: For high shielding efficiency
- Self-extinguishing, free from halogens and cadmium
- Excellent impact strength
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)
- Up to IP68 / NEMA 6P protection with the reinforced sealing cap at conduit side

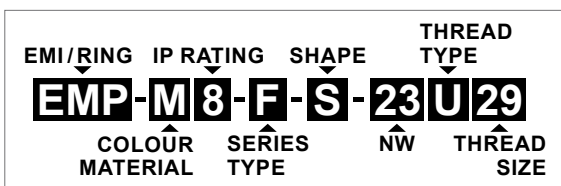

Specifications are subject to change without notice

Order No.	THD UNEF	Fits to	Fits to	A		L		OD1		OD2		SP1	
		NW	Braid	mm	in	mm	in	mm	in	mm	in	mm	in
EMP-M8-F-S-10U15	5/8"-24	10	10	8.0	0.31	81.5	3.21	20.0	0.79	25.0	0.98	17.0	0.67
EMP-M8-F-S-12U15	5/8"-24	12	12.5	8.0	0.31	87.5	3.44	24.0	0.94	29.0	1.14	20.0	0.79
EMP-M8-F-S-12U16	11/16"-24	12	12.5	8.0	0.31	91.5	3.60	24.0	0.94	29.0	1.14	20.0	0.79
EMP-M8-F-S-12U18	3/4"-20	12	12.5	9.0	0.35	89.0	3.50	24.0	0.94	29.0	1.14	20.0	0.79
EMP-M8-F-S-17U18	3/4"-20	17	15	9.0	0.35	90.0	3.54	30.0	1.18	32.0	1.26	26.0	1.02
EMP-M8-F-S-12U21	7/8"-20	12	12.5	9.0	0.35	89.5	3.52	24.0	0.94	29.0	1.14	20.0	0.79
EMP-M8-F-S-17U21	7/8"-20	17	15	9.0	0.35	90.5	3.56	30.0	1.18	32.0	1.26	26.0	1.02
EMP-M8-F-S-23U21	7/8"-20	23	20	9.0	0.35	107.0	4.21	38.0	1.50	40.5	1.59	32.0	1.26
EMP-M8-F-S-12U24	1"-20	12	12.5	9.0	0.35	89.0	3.50	24.0	0.94	29.0	1.14	20.0	0.79
EMP-M8-F-S-17U24	1"-20	17	15	9.0	0.35	90.0	3.54	30.0	1.18	32.0	1.26	26.0	1.02
EMP-M8-F-S-23U24	1"-20	23	20	9.0	0.35	107.0	4.21	38.0	1.50	40.5	1.59	32.0	1.26
EMP-M8-F-S-12U29	1-3/16"-18	12	12.5	9.0	0.35	89.0	3.50	24.0	0.94	35.0	1.38	20.0	0.79
EMP-M8-F-S-17U29	1-3/16"-18	17	15	9.0	0.35	90.5	3.56	30.0	1.18	35.0	1.38	26.0	1.02
EMP-M8-F-S-23U29	1-3/16"-18	23	20	9.0	0.35	110.0	4.33	38.0	1.50	40.5	1.59	32.0	1.26
EMP-M8-F-S-29U29	1-3/16"-18	29	30	9.0	0.35	112.0	4.41	45.5	1.79	48.0	1.89	40.0	1.57
EMP-M8-F-S-17U35	1-7/16"-18	17	15	9.0	0.35	92.5	3.64	30.0	1.18	42.5	1.67	26.0	1.02
EMP-M8-F-S-23U35	1-7/16"-18	23	20	9.0	0.35	110.0	4.33	38.0	1.50	42.5	1.67	32.0	1.26
EMP-M8-F-S-29U35	1-7/16"-18	29	30	9.0	0.35	110.0	4.33	45.5	1.79	48.0	1.89	40.0	1.57
EMP-M8-F-S-36U35	1-7/16"-18	36	35	9.0	0.35	119.5	4.70	57.0	2.24	56.0	2.20	50.0	1.97
EMP-M8-F-S-23U40	1-5/8"-18 UNS	23	20	9.0	0.35	114.5	4.51	38.0	1.50	45.5	1.79	32.0	1.26
EMP-M8-F-S-29U40	1-5/8"-18 UNS	29	30	9.0	0.35	116.5	4.59	45.5	1.79	48.0	1.89	40.0	1.57
EMP-M8-F-S-17U43	1-3/4"-18 UNS	17	15	10.0	0.39	97.0	3.82	30.0	1.18	48.0	1.89	26.0	1.02
EMP-M8-F-S-23U43	1-3/4"-18 UNS	23	20	10.0	0.39	114.5	4.51	38.0	1.50	48.0	1.89	32.0	1.26
EMP-M8-F-S-29U43	1-3/4"-18 UNS	29	30	10.0	0.39	117.0	4.61	45.5	1.79	48.0	1.89	40.0	1.57
EMP-M8-F-S-36U43	1-3/4"-18 UNS	36	35	10.0	0.39	124.5	4.90	57.0	2.24	56.0	2.20	50.0	1.97
EMP-M8-F-S-48U43	1-3/4"-18 UNS	48	40	10.0	0.39	134.5	5.30	68.0	2.68	70.0	2.76	64.0	2.52
EMP-M8-F-S-23U50	2"-18 UNS	23	20	10.0	0.39	113.5	4.47	38.0	1.50	54.0	2.13	32.0	1.26
EMP-M8-F-S-29U50	2"-18 UNS	29	30	10.0	0.39	117.0	4.61	45.5	1.79	54.0	2.13	40.0	1.57
EMP-M8-F-S-36U50	2"-18 UNS	36	35	10.0	0.39	124.5	4.90	57.0	2.24	56.0	2.20	50.0	1.97
EMP-M8-F-S-48U50	2"-18 UNS	48	40	10.0	0.39	134.5	5.30	68.0	2.68	70.0	2.76	64.0	2.52
EMP-M8-F-S-23U56	2-1/4"-16 UN	23	20	10.0	0.39	115.0	4.53	38.0	1.50	64.0	2.52	32.0	1.26
EMP-M8-F-S-29U56	2-1/4"-16 UN	29	30	10.0	0.39	117.0	4.61	45.5	1.79	64.0	2.52	40.0	1.57
EMP-M8-F-S-36U56	2-1/4"-16 UN	36	35	10.0	0.39	124.5	4.90	57.0	2.24	64.0	2.52	50.0	1.97
EMP-M8-F-S-48U56	2-1/4"-16 UN	48	40	10.0	0.39	134.5	5.30	68.0	2.68	70.0	2.76	64.0	2.52

**UNEF METAL THREAD**