




- For movable flexible cables, with spiral head
- Integrated anchorage, wide sealing and clamping range, easy to install
- Polyamide PA6 V-2 Dome nut & Gland body
- Polychloroprene-Nitrile rubber CR/NBR Sealing ring
- IP 68 up to 10 bar to the cable and pressure screw
- Temperature range: -20°C (-4°F) to 100°C (212°F)
- Test standard: EN 50262 / UL 514B

IP RATING SERIES THD. SIZE
K8-GF-J-P13-12
 COLOUR MATERIAL TYPE THD. TYPE MAX. CABLE RANGE

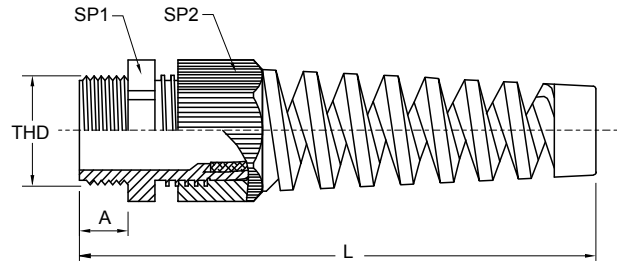

Specifications are subject to change without notice

PG
THREAD

Order No.	THD	Cable Range	A		SP1		SP2		L	
			mm	in	mm	in	mm	in	mm	in
IP68	PG	mm	mm	in	mm	in	mm	in	mm	in
K8-GF-J-P07-6.5	7	3-6.5	8.0	0.31	15.0	0.59	15.0	0.59	63.0	2.48
K8-GF-J-P09-8	9	4-8	8.0	0.31	19.0	0.75	19.0	0.75	74.0	2.91
K8-GF-J-P11-10	11	5-10	8.0	0.31	22.0	0.87	22.0	0.87	87.0	3.43
K8-GF-J-P13-12	13.5	6-12	9.0	0.35	24.0	0.94	24.0	0.94	98.0	3.86
K8-GF-J-P16-14	16	10-14	10.0	0.39	27.0	1.06	27.0	1.06	112.0	4.41
K8-GF-J-P21-18	21	13-18	11.0	0.43	33.0	1.30	33.0	1.30	130.0	5.12