



TEAFLEX

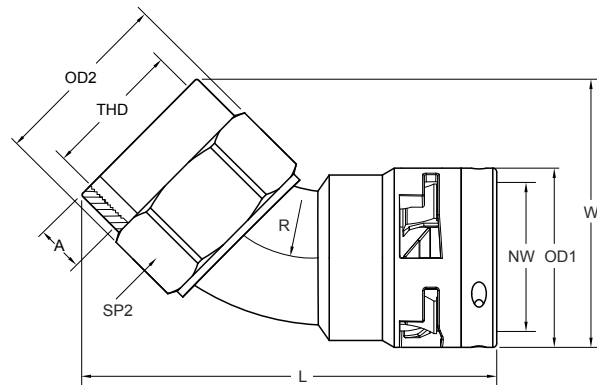

- Locking device system provides a quick and secure push-in connection of corrugated conduits
- High-grade formulated polyamide, with black anodized aluminum thread
- Self-extinguishing, free from halogens and cadmium
- Excellent impact strength
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)
- Up to IP68 / NEMA 6P protection with the reinforced sealing cap at conduit side
- Colour: Black standard, other colours available upon request

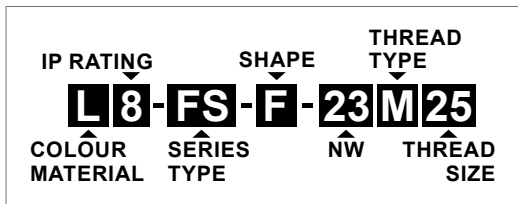

Specifications are subject to change without notice

**METRIC METAL THREAD**

Order No.	Order No.	THD	Fits to Conduit			A		L		R		W		OD1		OD2		SP2	
IP66	IP68	Metric	NW	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
L6-FS-F-10M16	L8-FS-F-10M16	M16x1.5	10	12	5/16	11.0	0.43	66.3	2.61	31.2	1.23	37.8	1.49	20.0	0.79	28.0	1.10	25.4	1.00
L6-FS-F-12M16	L8-FS-F-12M16	M16x1.5	12	16	3/8	11.0	0.43	69.7	2.74	31.6	1.24	41.5	1.63	24.0	0.94	28.0	1.10	25.4	1.00
L6-FS-F-17M20	L8-FS-F-17M20	M20x1.5	17	20	1/2	12.0	0.47	79.4	3.13	37.6	1.48	46.4	1.83	30.0	1.18	35.0	1.38	31.8	1.25
L6-FS-F-17M25	L8-FS-F-17M25	M25x1.5	17	20	1/2	12.0	0.47	81.2	3.20	37.6	1.48	48.2	1.90	30.0	1.18	35.0	1.38	31.8	1.25
L6-FS-F-23M25	L8-FS-F-23M25	M25x1.5	23	25	3/4	12.0	0.47	92.8	3.65	41.5	1.63	56.4	2.22	38.0	1.50	42.0	1.65	38.1	1.50
L6-FS-F-23M32	L8-FS-F-23M32	M32x1.5	23	25	3/4	12.0	0.47	93.3	3.67	41.5	1.63	56.9	2.24	38.0	1.50	42.0	1.65	38.1	1.50
L6-FS-F-29M32	L8-FS-F-29M32	M32x1.5	29	32	1	13.5	0.53	101.8	4.01	47.5	1.87	64.4	2.54	45.5	1.79	49.0	1.93	44.5	1.75
L6-FS-F-36M40	L8-FS-F-36M40	M40x1.5	36	40	1-1/4	13.5	0.53	115.9	4.56	59.4	2.34	74.3	2.93	57.0	2.24	56.0	2.20	50.8	2.00
L6-FS-F-48M50	L8-FS-F-48M50	M50x1.5	48	50	1-1/2	14.5	0.57	136.9	5.39	63.3	2.49	89.2	3.51	68.0	2.68	70.0	2.76	63.5	2.50
L6-FS-F-48M63	L8-FS-F-48M63	M63x1.5	48	50	1-1/2	14.5	0.57	140.2	5.52	63.3	2.49	92.4	3.64	68.0	2.68	78.0	3.07	69.8	2.75