



TEAFLEX

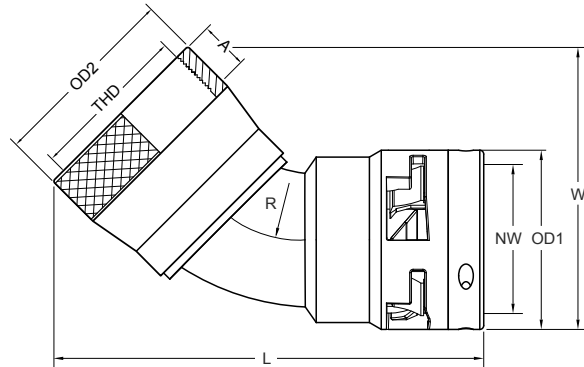

- Locking device system provides a quick and secure push-in connection of corrugated conduits
- High-grade formulated polyamide, with black anodized aluminum thread
- Self-extinguishing, free from halogens and cadmium
- Excellent impact strength
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)
- Up to IP68 / NEMA 6P protection with the reinforced sealing cap at conduit side
- Colour: Black standard, other colours available upon request

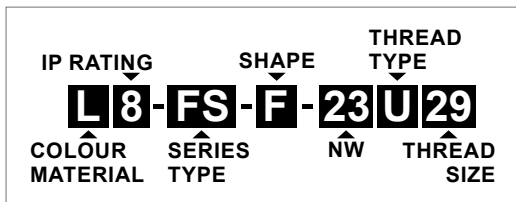

Specifications are subject to change without notice

Order No.	Order No.	THD	Fits to Conduit			A		L		R		W		OD1		OD2	
IP66	IP68	UNEF	NW	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
L6-FS-F-12U15	L8-FS-F-12U15	5/8"-24	12	16	3/8	8.0	0.31	67.5	2.66	31.6	1.24	39.3	1.55	24.0	0.94	25.4	1.00
L6-FS-F-17U18	L8-FS-F-17U18	3/4"-20	17	20	1/2	9.0	0.35	76.8	3.02	37.6	1.48	44.0	1.73	30.0	1.18	30.0	1.18
L6-FS-F-10U21	L8-FS-F-10U21	7/8"-20	10	12	5/16	9.0	0.35	67.2	2.65	31.2	1.23	38.7	1.52	20.0	0.79	27.0	1.06
L6-FS-F-12U21	L8-FS-F-12U21	7/8"-20	12	16	3/8	9.0	0.35	70.6	2.78	31.6	1.24	42.4	1.67	24.0	0.94	27.0	1.06
L6-FS-F-17U21	L8-FS-F-17U21	7/8"-20	17	20	1/2	9.0	0.35	78.6	3.09	37.6	1.48	45.7	1.80	30.0	1.18	30.0	1.18
L6-FS-F-12U24	L8-FS-F-12U24	1"-20	12	16	3/8	9.0	0.35	71.4	2.81	31.6	1.24	43.3	1.70	24.0	0.94	29.4	1.16
L6-FS-F-17U24	L8-FS-F-17U24	1"-20	17	20	1/2	9.0	0.35	79.3	3.12	37.6	1.48	46.4	1.83	30.0	1.18	30.0	1.18
L6-FS-F-23U24	L8-FS-F-23U24	1"-20	23	25	3/4	9.0	0.35	88.7	3.49	41.5	1.63	52.3	2.06	38.0	1.50	36.0	1.42
L6-FS-F-12U29	L8-FS-F-12U29	1 3/16"-18	12	16	3/8	9.0	0.35	74.5	2.93	31.6	1.24	46.4	1.83	24.0	0.94	34.2	1.35
L6-FS-F-17U29	L8-FS-F-17U29	1 3/16"-18	17	20	1/2	9.0	0.35	80.7	3.18	37.6	1.48	47.8	1.88	30.0	1.18	34.2	1.35
L6-FS-F-23U29	L8-FS-F-23U29	1 3/16"-18	23	25	3/4	9.0	0.35	90.4	3.56	41.5	1.63	54.0	2.13	38.0	1.50	36.0	1.42
L6-FS-F-29U29	L8-FS-F-29U29	1 3/16"-18	29	32	1	9.0	0.35	100.1	3.94	47.5	1.87	62.8	2.47	45.5	1.79	44.4	1.75
L6-FS-F-12U35	L8-FS-F-12U35	1 7/16"-18	12	16	3/8	10.0	0.39	82.4	3.24	31.6	1.24	54.3	2.14	24.0	0.94	40.5	1.59
L6-FS-F-17U35	L8-FS-F-17U35	1 7/16"-18	17	20	1/2	9.0	0.35	85.8	3.38	37.6	1.48	52.9	2.08	30.0	1.18	40.5	1.59
L6-FS-F-23U35	L8-FS-F-23U35	1 7/16"-18	23	25	3/4	9.0	0.35	92.6	3.65	41.5	1.63	56.2	2.21	38.0	1.50	40.5	1.59
L6-FS-F-29U35	L8-FS-F-29U35	1 7/16"-18	29	32	1	9.0	0.35	99.5	3.92	47.5	1.87	62.1	2.44	45.5	1.79	44.4	1.75
L6-FS-F-36U35	L8-FS-F-36U35	1 7/16"-18	36	40	1-1/4	9.0	0.35	111.3	4.38	59.4	2.34	69.8	2.75	57.0	2.24	50.8	2.00
L6-FS-F-17U43	L8-FS-F-17U43	1 3/4"-18UNS	17	20	1/2	10.0	0.39	88.6	3.49	37.6	1.48	55.8	2.20	30.0	1.18	48.5	1.91
L6-FS-F-23U43	L8-FS-F-23U43	1 3/4"-18UNS	23	25	3/4	10.0	0.39	99.7	3.93	41.5	1.63	63.3	2.49	38.0	1.50	48.5	1.91
L6-FS-F-29U43	L8-FS-F-29U43	1 3/4"-18UNS	29	32	1	10.0	0.39	103.1	4.06	47.5	1.87	65.7	2.59	45.5	1.79	50.5	1.99
L6-FS-F-36U43	L8-FS-F-36U43	1 3/4"-18UNS	36	40	1-1/4	10.0	0.39	114.9	4.52	59.4	2.34	73.4	2.89	57.0	2.24	50.8	2.00
L6-FS-F-23U50	L8-FS-F-23U50	2"-18UNS	23	25	3/4	10.0	0.39	101.9	4.01	41.5	1.63	65.5	2.58	38.0	1.50	54.8	2.16
L6-FS-F-29U50	L8-FS-F-29U50	2"-18UNS	29	32	1	10.0	0.39	105.3	4.15	47.5	1.87	67.9	2.67	45.5	1.79	56.8	2.24
L6-FS-F-36U50	L8-FS-F-36U50	2"-18UNS	36	40	1-1/4	10.0	0.39	117.0	4.61	59.4	2.34	75.5	2.97	57.0	2.24	56.8	2.24
L6-FS-F-48U50	L8-FS-F-48U50	2"-18UNS	48	50	1-1/2	10.0	0.39	132.6	5.22	63.3	2.49	84.8	3.34	68.0	2.68	66.0	2.60
L6-FS-F-23U56	L8-FS-F-23U56	2 1/4"-16UN	23	25	3/4	10.0	0.39	105.6	4.16	41.5	1.63	69.2	2.72	38.0	1.50	61.2	2.41
L6-FS-F-29U56	L8-FS-F-29U56	2 1/4"-16UN	29	32	1	10.0	0.39	109.8	4.32	47.5	1.87	72.4	2.85	45.5	1.79	63.5	2.50
L6-FS-F-36U56	L8-FS-F-36U56	2 1/4"-16UN	36	40	1-1/4	10.0	0.39	122.2	4.81	59.4	2.34	80.7	3.18	57.0	2.24	63.5	2.50
L6-FS-F-48U56	L8-FS-F-48U56	2 1/4"-16UN	48	50	1-1/2	10.0	0.39	135.0	5.31	63.3	2.49	87.2	3.43	68.0	2.68	66.0	2.60

UNEF METAL THREAD