


TEAFLEX



- Locking device system provides a quick and secure push-in connection of corrugated conduits
- High-grade formulated polyamide, with black anodized aluminum thread
- Self-extinguishing, free from halogens and cadmium
- Excellent impact strength
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)
- Up to IP68 / NEMA 6P protection with the reinforced sealing cap at conduit side
- Colour: Black standard, other colours available upon request

IP RATING	SHAPE	THREAD TYPE
L8-FS-S-17M25		
COLOUR MATERIAL	SERIES TYPE	NW THREAD SIZE

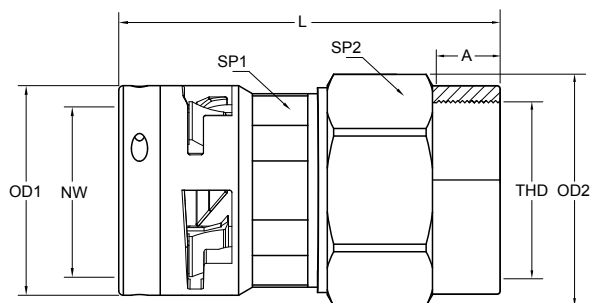

Specifications are subject to change without notice

**METRIC
METAL
THREAD**

Order No.	Order No.	THD	Fits to Conduit			A		L		OD1		OD2		SP1		SP2	
IP66	IP68	Metric	NW	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
L6-FS-S-10M16	L8-FS-S-10M16	M16x1.5	10	12	5/16	11.0	0.43	54.5	2.10	20.0	0.79	28.0	1.10	17.0	0.67	25.4	1.00
L6-FS-S-12M16	L8-FS-S-12M16	M16x1.5	12	16	3/8	11.0	0.43	58.3	2.25	24.0	0.94	28.0	1.10	20.0	0.79	25.4	1.00
L6-FS-S-17M20	L8-FS-S-17M20	M20x1.5	17	20	1/2	12.0	0.47	60.6	2.34	30.0	1.18	35.0	1.38	26.0	1.02	31.8	1.25
L6-FS-S-17M25	L8-FS-S-17M25	M25x1.5	17	20	1/2	12.0	0.47	60.6	2.34	30.0	1.50	35.0	1.38	26.0	1.02	31.8	1.25
L6-FS-S-23M25	L8-FS-S-23M25	M25x1.5	23	25	3/4	12.0	0.47	69.5	2.70	38.0	1.50	42.0	1.65	32.0	1.26	38.1	1.50
L6-FS-S-23M32	L8-FS-S-23M32	M32x1.5	23	25	3/4	12.0	0.47	69.9	2.70	38.0	1.50	42.0	1.65	32.0	1.26	38.1	1.50
L6-FS-S-29M32	L8-FS-S-29M32	M32x1.5	29	32	1	13.5	0.53	74.5	2.83	45.5	1.79	49.0	1.93	40.0	1.57	44.5	1.75
L6-FS-S-36M40	L8-FS-S-36M40	M40x1.5	36	40	1-1/4	13.5	0.53	82.9	3.19	57.0	2.24	56.0	2.20	50.0	1.97	50.8	2.00
L6-FS-S-48M50	L8-FS-S-48M50	M50x1.5	48	50	1-1/2	14.5	0.57	93.4	3.62	68.0	2.68	70.0	2.76	64.0	2.52	63.5	2.50
L6-FS-S-48M63	L8-FS-S-48M63	M63x1.5	48	50	1-1/2	14.5	0.57	93.4	3.62	68.0	2.68	78.0	3.07	64.0	2.52	69.8	2.75