



# LFSS Straight Swivel, Female Metal Thread, Polyamide Connector



TEAFLEX



- Locking device system provides a quick and secure push-in connection of corrugated conduits
- High-grade formulated polyamide, with black anodized aluminum thread
- Self-extinguishing, free from halogens and cadmium
- Excellent impact strength
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)
- Up to IP68 / NEMA 6P protection with the reinforced sealing cap at conduit side
- Colour: Black standard, other colours available upon request

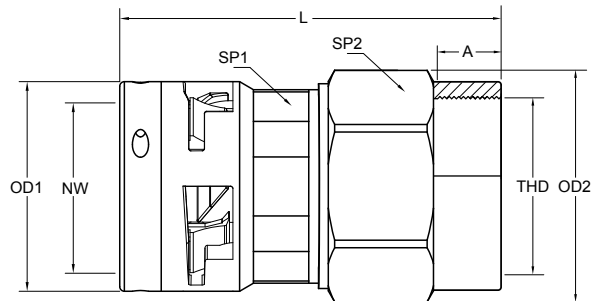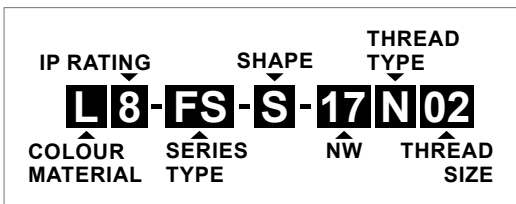

Specifications are subject to change without notice

NPT METAL THREAD

Order No.	Order No.	THD	Fits to Conduit			A		L		OD1		OD2		SP1		SP2	
IP66	IP68	NPT	NW	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
L6-FS-S-12N02	L8-FS-S-12N02	1/2	12	16	3/8	11.0	0.43	59.2	2.33	24.0	0.94	28.0	1.10	20.0	0.79	25.4	1.00
L6-FS-S-17N02	L8-FS-S-17N02	1/2	17	20	1/2	13.5	0.53	62.1	2.44	30.0	1.79	35.0	1.38	26.0	1.02	31.8	1.25
L6-FS-S-23N04	L8-FS-S-23N04	3/4	23	25	3/4	14.0	0.55	71.9	2.83	38.0	1.50	42.0	1.65	32.0	1.26	38.1	1.50
L6-FS-S-29N06	L8-FS-S-29N06	1	29	32	1	17.3	0.68	78.5	3.09	45.5	1.79	49.0	1.93	40.0	1.57	44.5	1.75
L6-FS-S-36N07	L8-FS-S-36N07	1-1/4	36	40	1-1/4	18.0	0.71	87.4	3.44	57.0	2.24	56.0	2.20	50.0	1.97	50.8	2.00
L6-FS-S-48N09	L8-FS-S-48N09	2	48	50	1-1/2	19.0	0.75	97.9	3.85	68.0	2.68	70.0	2.76	64.0	2.52	63.5	2.50