

TEAFLEX




MIL-C5015

CIRCULAR CONNECTORS

- Locking device system provides a quick and secure push-in connection of corrugated conduits
- High-grade formulated polyamide, with black anodized aluminum thread
- Self-extinguishing, free from halogens and cadmium
- Excellent impact strength
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)
- Up to IP68 / NEMA 6P protection with the reinforced sealing cap at conduit side
- Colour: Black standard, other colours available upon request

IP RATING: **L8**
SHAPE: **F-S**
THREAD TYPE: **23U29**

COLOUR MATERIAL: **L**
SERIES TYPE: **8**
NW: **23**
THREAD SIZE: **29**

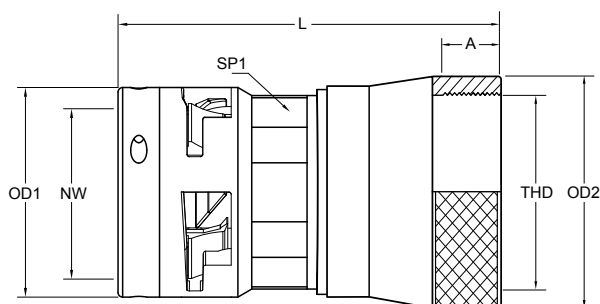

Specifications are subject to change without notice

Order No. IP66	Order No. IP68	THD UNEF	Shell Size MIL-C5015	Fits to Conduit			A		L		OD1		SP1		OD2	
				NW	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
L6-F-S-10U15	L8-F-S-10U15	5/8"-24	10	10	12	5/16	8.0	0.31	52.0	2.05	20.0	0.79	17.0	0.67	23.5	0.93
L6-F-S-12U15	L8-F-S-12U15	5/8"-24	10	12	16	3/8	8.0	0.31	55.3	2.18	24.0	0.94	20.0	0.79	25.4	1.00
L6-F-S-17U18	L8-F-S-17U18	3/4"-20	14	17	20	1/2	9.0	0.35	57.6	2.27	30.0	1.18	26.0	1.02	30.0	1.18
L6-F-S-10U21	L8-F-S-10U21	7/8"-20	16	10	12	5/16	9.0	0.35	52.5	2.07	20.0	0.79	17.0	0.67	27.0	1.06
L6-F-S-12U21	L8-F-S-12U21	7/8"-20	16	12	16	3/8	9.0	0.35	56.3	2.22	24.0	0.94	20.0	0.79	27.0	1.06
L6-F-S-17U21	L8-F-S-17U21	7/8"-20	16	17	20	1/2	9.0	0.35	57.6	2.27	30.0	1.18	26.0	1.02	30.0	1.18
L6-F-S-12U24	L8-F-S-12U24	1"-20	18	12	16	3/8	9.0	0.35	56.3	2.22	24.0	0.94	20.0	0.79	29.4	1.16
L6-F-S-17U24	L8-F-S-17U24	1"-20	18	17	20	1/2	9.0	0.35	57.6	2.27	30.0	1.18	26.0	1.02	30.0	1.18
L6-F-S-23U24	L8-F-S-23U24	1"-20	18	23	25	3/4	9.0	0.35	66.9	2.63	38.0	1.50	32.0	1.26	36.0	1.42
L6-F-S-12U29	L8-F-S-12U29	1 3/16"-18	20 / 22	12	16	3/8	9.0	0.35	58.3	2.30	24.0	0.94	20.0	0.79	34.2	1.35
L6-F-S-17U29	L8-F-S-17U29	1 3/16"-18	20 / 22	17	20	1/2	9.0	0.35	57.6	2.27	30.0	1.18	26.0	1.02	34.2	1.35
L6-F-S-23U29	L8-F-S-23U29	1 3/16"-18	20 / 22	23	25	3/4	9.0	0.35	66.9	2.63	38.0	1.50	32.0	1.26	36.0	1.42
L6-F-S-29U29	L8-F-S-29U29	1 3/16"-18	20 / 22	29	32	1	9.0	0.35	74.0	2.91	45.5	1.79	40.0	1.57	44.4	1.75
L6-F-S-12U35	L8-F-S-12U35	1 7/16"-18	24 / 28	12	16	3/8	10.0	0.39	66.3	2.61	24.0	0.94	20.0	0.79	40.5	1.59
L6-F-S-17U35	L8-F-S-17U35	1 7/16"-18	24 / 28	17	20	1/2	9.0	0.35	61.6	2.43	30.0	1.18	26.0	1.02	40.5	1.59
L6-F-S-23U35	L8-F-S-23U35	1 7/16"-18	24 / 28	23	25	3/4	9.0	0.35	66.9	2.63	38.0	1.50	32.0	1.26	40.5	1.59
L6-F-S-29U35	L8-F-S-29U35	1 7/16"-18	24 / 28	29	32	1	9.0	0.35	70.0	2.76	45.5	1.79	40.0	1.57	44.4	1.75
L6-F-S-36U35	L8-F-S-36U35	1 7/16"-18	24 / 28	36	40	1-1/4	9.0	0.35	78.4	3.09	57.0	2.24	50.0	1.97	50.8	2.00
L6-F-S-17U43	L8-F-S-17U43	1 3/4"-18UNS	32	17	20	1/2	10.0	0.39	61.6	2.43	30.0	1.18	26.0	1.02	48.5	1.91
L6-F-S-23U43	L8-F-S-23U43	1 3/4"-18UNS	32	23	25	3/4	10.0	0.39	73.0	2.87	38.0	1.50	32.0	1.26	48.5	1.91
L6-F-S-29U43	L8-F-S-29U43	1 3/4"-18UNS	32	29	32	1	10.0	0.39	71.0	2.80	45.5	1.79	40.0	1.57	50.5	1.99
L6-F-S-36U43	L8-F-S-36U43	1 3/4"-18UNS	32	36	40	1-1/4	10.0	0.39	79.4	3.13	57.0	2.24	50.0	1.97	50.8	2.00
L6-F-S-23U50	L8-F-S-23U50	2"-18UNS	36	23	25	3/4	10.0	0.39	73.0	2.87	38.0	1.50	32.0	1.26	54.8	2.16
L6-F-S-29U50	L8-F-S-29U50	2"-18UNS	36	29	32	1	10.0	0.39	71.0	2.80	45.5	1.79	40.0	1.57	56.8	2.24
L6-F-S-36U50	L8-F-S-36U50	2"-18UNS	36	36	40	1-1/4	10.0	0.39	79.4	3.13	57.0	2.24	50.0	1.97	56.8	2.24
L6-F-S-48U50	L8-F-S-48U50	2"-18UNS	36	48	50	1-1/2	10.0	0.39	88.9	3.50	68.0	2.68	64.0	2.52	66.0	2.60
L6-F-S-23U56	L8-F-S-23U56	2 1/4"-16UN	40	23	25	3/4	10.0	0.39	74.9	2.95	38.0	1.50	32.0	1.26	61.2	2.41
L6-F-S-29U56	L8-F-S-29U56	2 1/4"-16UN	40	29	32	1	10.0	0.39	74.0	2.91	45.5	1.79	40.0	1.57	63.5	2.50
L6-F-S-36U56	L8-F-S-36U56	2 1/4"-16UN	40	36	40	1-1/4	10.0	0.39	83.4	3.28	57.0	2.24	50.0	1.97	63.5	2.50
L6-F-S-48U56	L8-F-S-48U56	2 1/4"-16UN	40	48	50	1-1/2	10.0	0.39	88.9	3.50	68.0	2.68	64.0	2.52	66.0	2.60

UNEF
METAL
THREAD