


Optimal screening is guaranteed through 360° clamping of the braid to the fitting. For use in applications, installations and systems where the requirements of EMI/EMC regulations must be fulfilled. Low impedance connection allows high short circuit currents to pass.

Screening Effectiveness



Transfer Impedance based on the triaxial-methode (V- MS3606B)

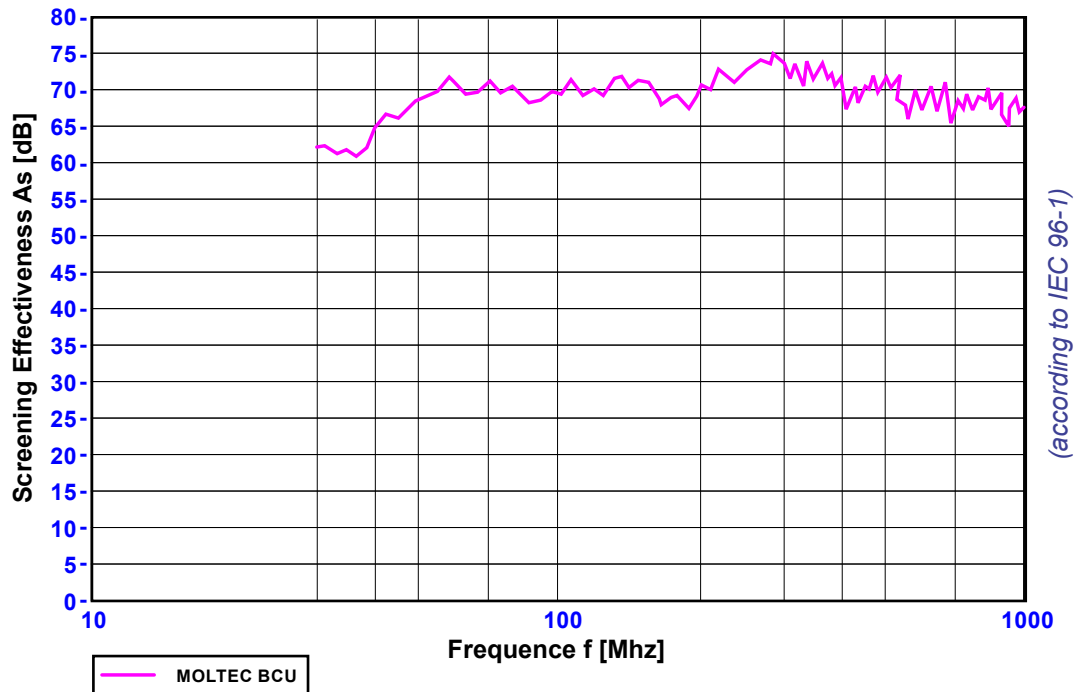