



The elastic conduit termination sleeve, made of thermoplastic elastomer material (TPE), is self-extinguishing, free-halogen and protects conduits against ingress of dirt and dust. RGK can be cut to fit onto the desired diameter of the applied cable or cable bundle and must be installed tightly. RGK suits to conduits with fine and coarse profiles and available in standard colour black.




- Specially formulated TPE material
- Halogens and non-flame propagating
- Excellent weather resistance
- Temperature range: -40°C(-40°F) to 150°C(302°F)

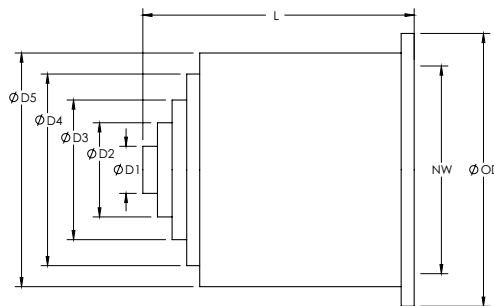

SUITS TO CONDUITS WITH FINE AND COARSE PROFILES



Fine Profile **F**
Tight bend radius



Coarse Profile **C**
High pull-out strength

Specifications are subject to change without notice

Order No.	Fits to	ØD1		ØD2		ØD3		ØD4		ØD5		ØOD		L	
	NW	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
RGK-07	07	4.9	0.19	7.3	0.29	9.5	0.37	N/A	N/A	11.7	0.46	18.0	0.71	28.5	1.12
RGK-10	10	4.9	0.19	8.2	0.32	11.5	0.45	N/A	N/A	14.4	0.56	21.0	0.83	31.2	1.23
RGK-12	12	4.8	0.19	8.2	0.32	11.5	0.45	14.5	0.57	17.0	0.67	24.0	0.94	35.5	1.40
RGK-17	17	4.8	0.19	10.0	0.39	14.0	0.55	18.5	0.73	23.0	0.91	29.0	1.14	36.8	1.45
RGK-23	23	6.0	0.24	12.0	0.47	18.4	0.72	24.0	0.94	30.0	1.18	36.0	1.42	39.0	1.54
RGK-29	29	7.0	0.28	14.5	0.57	21.8	0.86	29.5	1.16	36.5	1.44	42.0	1.65	41.0	1.61
RGK-36	36	8.5	0.33	17.8	0.70	26.5	1.04	35.3	1.39	44.0	1.73	48.0	1.89	44.5	1.75
RGK-48	48	11.0	0.43	22.0	0.87	33.3	1.31	44.3	1.74	54.0	2.13	61.0	2.40	48.0	1.89